PREXOLID® 2025

CAD/CAM ABUTMENTS

Precision Fit. No Micro Gaps. Total Confidence



PREXOLID®


CAD/CAM ABUTMENTS

PREXOLID CAD/CAM ABUTMENTS are pre-milled with ultra-high-precision interfaces to ensure a perfect fit with your implant system—eliminating micro gaps and enhancing long-term stability.

Engineered for Seamless Implant Connections





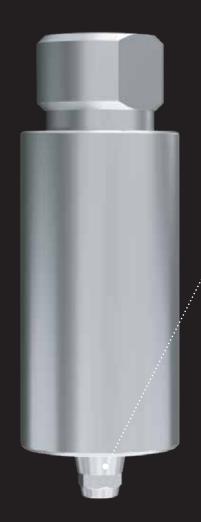



Ultra-precise pre-milled Implant Interfaces



Perfect Sealing

Each abutment is precisely designed to fit its implant perfectly.



Superior Stability

Ensures a stable and durable long-term connection.



Premium Materials

Made from premium materials for high performance and biocompatibility.



Digital Efficiency

Streamlines production with digital design and precision manufacturing.





Impression

Lab Analog

Diameter	Platform	Model No.
Ø 3.0	Mini	LAM 30
Ø 3.5	MILLI	LAM 35
Ø 4.0	Regular	LAR 40



Digital Analog

Diameter	Platform	Model No.
Ø 4.0	Mini	DAM 40
Ø 4.5	Regular	DAR 45



Scanbody * Screw is included

Diameter	Platform	Length (mm)	Model No.
		10.0	SBMS
Ø 4.5	Mini	14.0	SBML
	Ø 5.5 Regular	10.0	SBRS
Ø 5.5		14.0	SBRL



Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Platform	Holder	Model No.
Ø 10.0	Mini	Arum (98.0mm)	PIPMA
Ø 14.0	Regular	Arum (98.0mm)	P4PRA



Ti-base Abutment * Abutment Screw is included

Diameter	Platform	Post Height	GH (mm)	Model No.
		1.0	1.0	TBSM 4041
Ø 4.0	Mini	2.0	2.0	TBSM 4041
		3.0	3.0	TBSM 4041
		1.0	1.0	TBSR 4541
Ø 4.5	Regular	2.0	2.0	TBSR 4542
		3.0	3.0	TBSR 4543







Impression

Lab Analog

Diameter	Platform	Model No.
Ø 3.5	Anyridge	LAR 35

Digital Analog

Diameter	Platform	Model No.
Ø 4.0	Anyridge	DAM 40

Scanbody * Screw is included

Diameter	Platform	Length (mm)	Model No.
Ø 4.0	Anyridge	13.0	SBRL

Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Platform	Holder	Model No.
Ø 10.0	Anyridge	A	PIMRA
Ø 12.0		Arum (98.0mm)	P2MRA

Ti-base Abutment * Abutment Screw is included

	Diameter	Platform	Post Height	Cuff Height	Model No.
	Ø 4.0 Anyridge	. 5	Hex	TBMR 404515H	
		Anyriage	4.5	нех	TBMR 404530H
	Ø 4.0	A		Man have	TBMR 404515N
		Anyridge	4.5	Non-hex	TBMR 404530N





Pre-milled Abutment

Diameter	Platform	Holder	Model No.
Ø 10.0	Anyone	Arum (98.0mm)	PIMOA
Ø 12.0	Anyone	Ardin (38.011111)	P2MOA







Digital Analog



Scanbody * Screw is included

Diameter	Platform	Length (mm)	Model No.
Ø 4.5	Superline	10.0	DAM 40

Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Platform	Holder	Model No.
Ø 10.0	Superline	Arum (98.0mm)	PIDSA
Ø 14.0			P4DSA



Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Type	Holder	Model No.
Ø 10.0	Narrow	Arum (98.0mm)	SBMS
Ø 12.0			SBML
Ø 10.0	Regular	Arum (98.0mm)	SBRS
Ø 12 O			SRDI



Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Platform	Holder	Model No.
Ø 11.5	RB/WB	Medentika	PISXM
Ø 15.8			P6SXM



Abutment

Pre-milled Abutment * Abutment Screw is included

Diameter	Platform	Holder	Model No.
Ø 11.5	GM	Medentika	P2NGM
Ø 15.8			P6NGM



2.5Hex











2.5Hex

PREXOLIO® CAD/CAM ABUTMENTS

PREXOLID CAD/CAM ABUTMENTS 2025

ECLECTIC Inc. ALL RIGHT RESERVED.

ECLECTIC and/or other trademarks and longs from ECLECTIC used here in are the trademarks or registered trademarks of ECLECTIC.



www.prexolid.com